

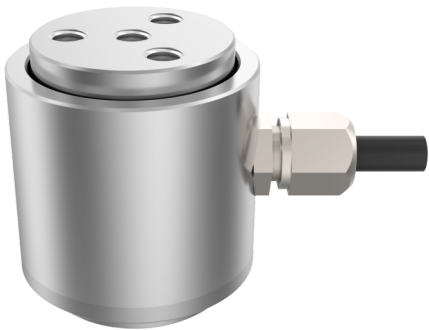


SG645

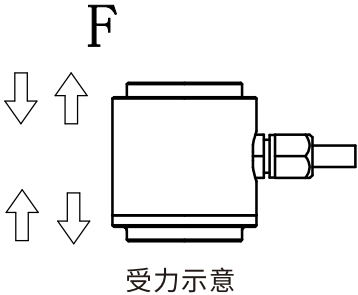


安装尺寸 / Mounting Dimensions

单位: mm

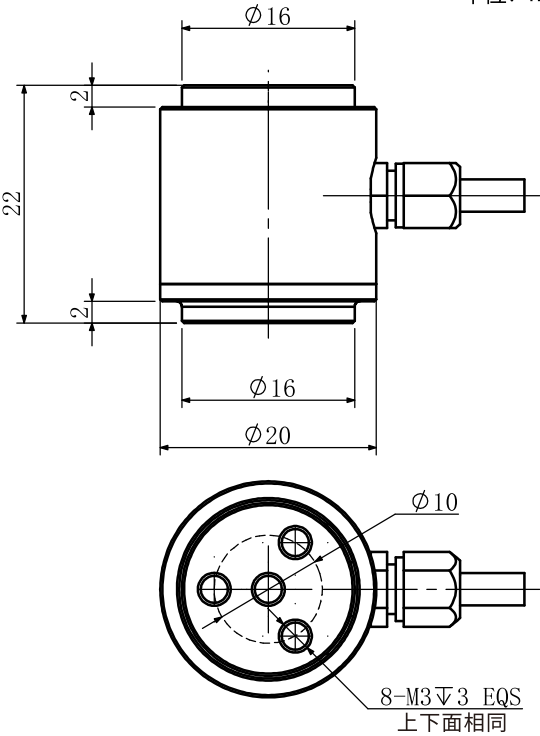

配线图 /Wiring Code

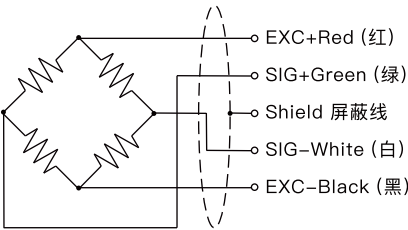

技术参数 / Technical Parameters

|         |                                                                                     |
|---------|-------------------------------------------------------------------------------------|
|         |  |
| 产品型号    | SG645                                                                               |
| 额定量程    | 20, 50, 100, 200, 500, 1000, 2000N                                                  |
| 输出灵敏度   | 2.0±10% $mV/V$                                                                      |
| 零点输出    | ±2%F.S.                                                                             |
| 蠕变      | ≤0.05%F.S.                                                                          |
| 非线性     | ≤0.05%F.S.                                                                          |
| 滞后      | ≤0.05%F.S.                                                                          |
| 重复性     | ≤0.05%F.S.                                                                          |
| 输入电阻    | 650/350±5 $\Omega$                                                                  |
| 输出电阻    | 650/350±5 $\Omega$                                                                  |
| 绝缘电阻    | ≥5000M $\Omega$ /100VDC                                                             |
| 温度灵敏度漂移 | 0.05%F.S./10 $^{\circ}C$                                                            |
| 零点温度漂移  | 0.05%F.S./10 $^{\circ}C$                                                            |
| 激励电压    | 5~12V                                                                               |
| 最大激励电压  | 15V                                                                                 |
| 温度补偿范围  | -10~60 $^{\circ}C$                                                                  |
| 工作温度范围  | -20~80 $^{\circ}C$                                                                  |
| 安全过载    | 150%F.S.                                                                            |
| 极限过载    | 200%F.S.                                                                            |
| 电缆线尺寸   | $\varnothing 3 \times 3m$                                                           |
| 材质      | 不锈钢                                                                                 |