



SG648

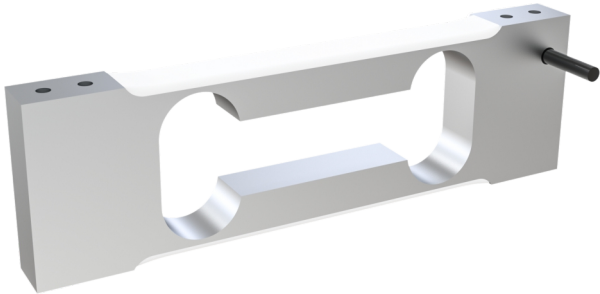


配线图 /Wiring Code

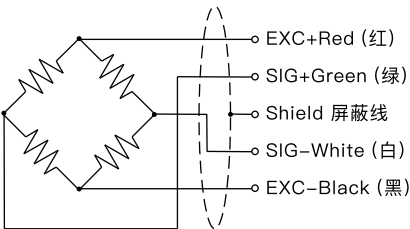

安装尺寸 /Mounting Dimensions

单位: mm

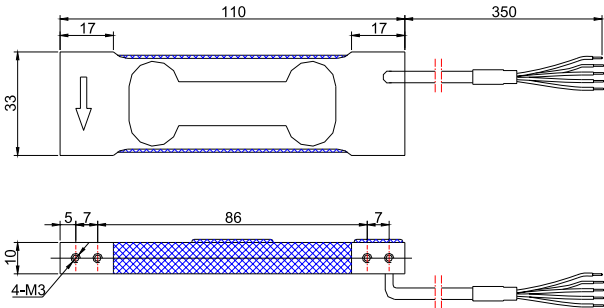

技术参数 / Technical Parameters

	
产品型号	SG648
额定量程	0.1, 0.2, 0.3, 0.6, 1, 1.5, 3kg
最小检定分度值	0.01, 0.05, 0.1, 0.2, 0.3, 0.5, 1g
灵敏度	1.3, $\pm 0.9 \pm 0.1$ mV/V
温度对零点影响	$\pm 0.0300\%$ of Cn/10K
温度对灵敏度影响	$\pm 0.0200\%$ of Cn/10K
非线性误差	$\pm 0.0150\%$ of Cn
滞后误差	$\pm 0.0050\%$ of Cn
蠕变/回零	$\pm 0.0150\%$ of Cn
秤盘面积	200×200mm
零点平衡	0 ± 0.05 mV/V
四角误差	$\pm 0.0233\%$ of Cn
输入电阻	$400 \pm 50 \Omega$
输出电阻	$350 \pm 5 \Omega$
参考电压	10V
最大工作电压	15V
绝缘电阻	$> 2 \text{ G}\Omega/100\text{VDC}$
额定温度范围	$-10 \sim +40 [+14 \sim +104]^{\circ}\text{C} [^{\circ}\text{F}]$
工作温度范围	$-10 \sim +50 [+14 \sim +122]^{\circ}\text{C} [^{\circ}\text{F}]$
存储温度范围	$-30 \sim +70 [-22 \sim +158]^{\circ}\text{C} [^{\circ}\text{F}]$
安全承载	150% of Emax
极限承载	200% of Emax