



SG703



安装尺寸 / Mounting Dimensions

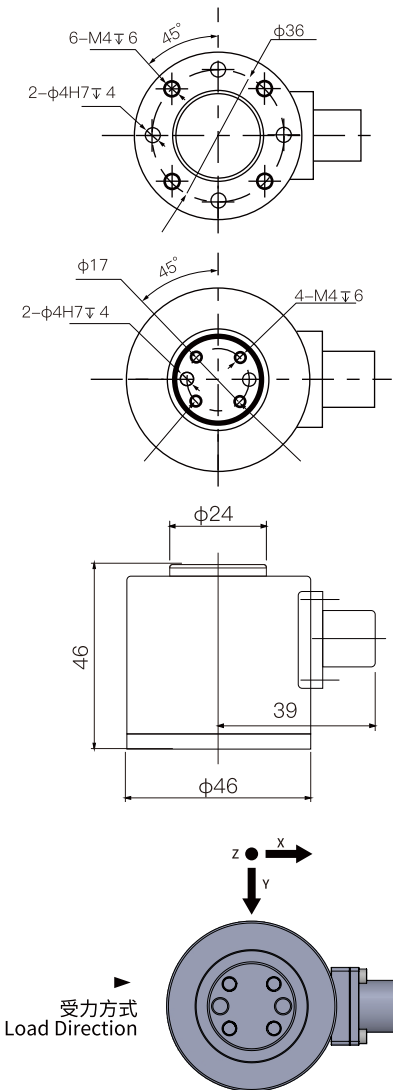

配线图 / Wiring Code

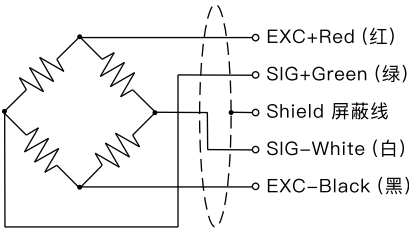

技术参数 / Technical Parameters

	
产品型号	SG703
额定量程	X: 50, 100, 200, 300, 500N
	Y: 50, 100, 200, 300, 500N
	Z: 50, 100, 200, 300, 500N
输出灵敏度	1.0±20% mV/V
零点输出	±0.2%F.S.
蠕变 (30min)	≤0.1%F.S.
互扰误差	≤0.1%F.S.
非线性	≤0.3%F.S.
滞后	≤0.3%F.S.
重复性	≤0.1%F.S.
输入电阻	350±5 Ω
输出电阻	350±5 Ω
绝缘电阻	≥5000M Ω /100VDC
温度灵敏度漂移	0.1%F.S./10°C
零点温度漂移	0.1%F.S./10°C
激励电压	5~12V
最大激励电压	15V
温度补偿范围	-10~40°C
工作温度范围	-20~75°C
安全过载	150%F.S.
极限过载	200%F.S.
电缆线尺寸	Φ5×3m
材质	不锈钢