

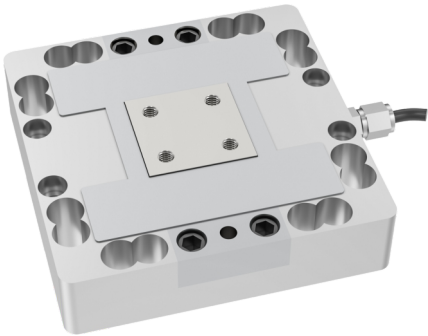


SG704

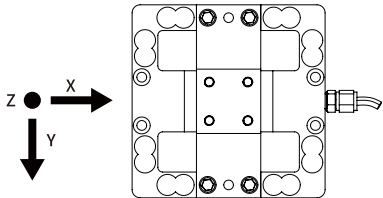


安装尺寸 / Mounting Dimensions

单位: mm

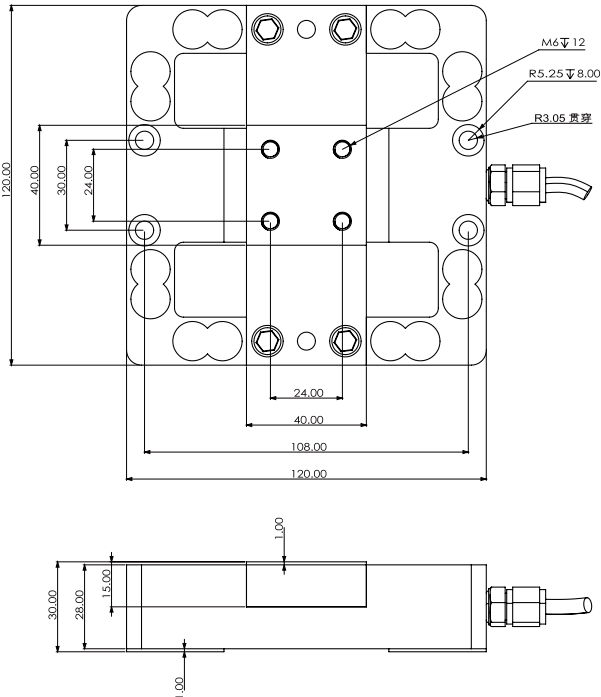

受力方式 ▲
Load Direction

配线图 /Wiring Code

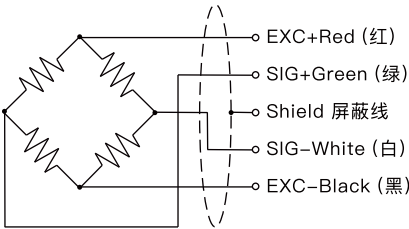

技术参数 / Technical Parameters

	
产品型号	SG704
额定量程	X: 50, 100, 200, 300N
	Y: 50, 100, 200, 300N
	Z: 50, 100, 200, 300N
输出灵敏度	±1.0±10% mV/V
零点输出	±0.02 mV/V
蠕变 (30min)	≤0.1%F.S.
互扰误差	≤0.3%F.S.
非线性	≤0.1%F.S.
滞后	≤0.1%F.S.
重复性	≤0.05%F.S.
输入电阻	X/Y: 785±20 Ω Z: 358±20 Ω
输出电阻	X/Y: 700±5 Ω Z: 300±5 Ω
绝缘电阻	≥5000M Ω /100VDC
温度灵敏度漂移	0.1%F.S./10°C
零点温度漂移	0.1%F.S./10°C
激励电压	5~12V
最大激励电压	15V
温度补偿范围	-10~40°C
工作温度范围	-20~75°C
安全过载	150%F.S.
极限过载	200%F.S.
电缆线尺寸	Φ5×3m
材质	合金钢