

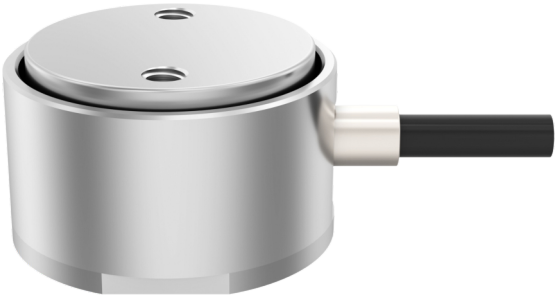


SG650

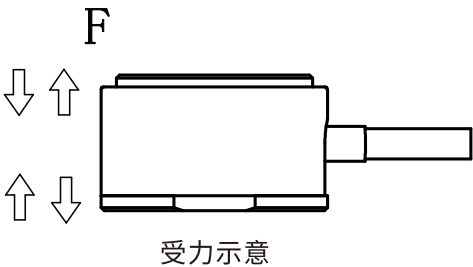


安装尺寸 / Mounting Dimensions

单位: mm

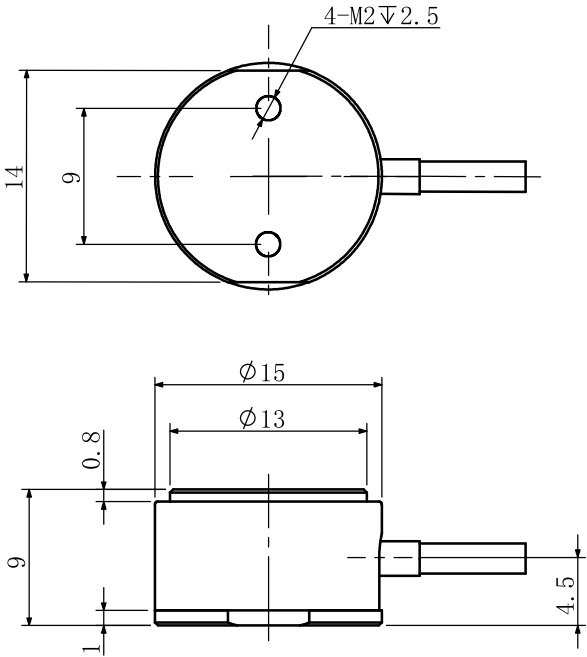

配线图 /Wiring Code

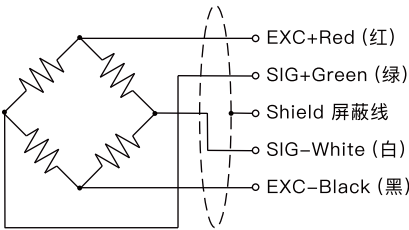

技术参数 / Technical Parameters

	
产品型号	SG650
额定量程	10, 20, 50, 100, 200N
输出灵敏度	2.0±10% mV/V
零点输出	±0.02 mV/V
蠕变	≤0.1%F.S.
非线性	≤0.1%F.S.
滞后	≤0.1%F.S.
重复性	≤0.1%F.S.
输入电阻	650/350±5 Ω
输出电阻	650/350±5 Ω
绝缘电阻	≥5000 $M\Omega/100VDC$
温度灵敏度漂移	0.05%F.S./10 $^{\circ}C$
零点温度漂移	0.05%F.S./10 $^{\circ}C$
激励电压	5V
最大激励电压	15V
温度补偿范围	-10~60 $^{\circ}C$
工作温度范围	-20~80 $^{\circ}C$
安全过载	150%F.S.
极限过载	200%F.S.
电缆线尺寸	$\Phi 2\times 3m$
材质	不锈钢